



Cable Grips

INFORMATION

Basic information for the identification of the most common type of cable stockings is contained in this section. The stockings listed are used for general cable pulling only. Variations such as galvanized and stainless steel thimbles, copper ferrules, stainless steel strands are also available.


Due to the variety of applications we recommend that you contact us with details of the application and work procedure to enable the selection of a suitable cable grip for safe working.

Tubular, Single Eye, Standard Duty

Description:

Standard duty grip. Two ply galvanised steel wire strand, alloy ferrule, soft eye.

CODE	CABLE DIAMETER mm	GRIP LENGTH mm
C1004	4-6	350
C1006	6-10	350
C1010	10-14	350
C1014	14-19	400
C1019	19-28	500
C1028	28-40	600
C1040	40-55	800
C1055	55-75	900
C1075	75-95	1000
C1095	95-120	1200
C1120	120-150	1400
C1150	150-190	1600

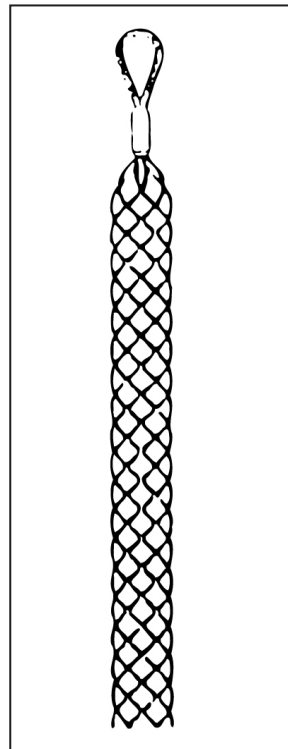

graphics used with permission of manufacturer