




Overhead Clamps


Tension Clamps Trunnion Wedge Type for Steel and Copper Conductors

Material: Body and wedges: aluminium-alloy. forged. Wedges: steel or malleable iron. hot dip galvanised. Trunnion straps: steel. hot dip galvanised. Bolts and screws: see separate table.						
BASIC CODE	DIMENSIONS mm		BREAKING STRENGTH kN	SHORT CIRCUIT CURRENT kA/1.0 sec	VARIATION	WEIGHT kg
	Conductor Diameter	L				
566.11/S1	≤ 9.0	210	70	20	2	1.3
566.11/S2	9.1-10.5	210	70	20	2	1.3
566.11/S3	10.6-11.7	210	70	20	2	1.3
566.03/S1	10.5-12.5	270	100	32	2	3.5
566.03/S2	12.6-14.0	270	100	32	2	3.5
566.03/S3	14.1-15.8	270	100	32	2	3.5
566.16CU/1	23.5-25.6	435	80	50	1+2	14.0
566.16CU/2	25.7-27.9	435	80	50	1+2	14.0
566.16CU/3	28.0-30.1	435	80	50	1+2	14.0
566.16CU/4	30.2-32.4	435	80	50	1+2	14.0
566.17/CU2	32.9-36.0	525	100	50	1+2	16.0
566.17/CU3	36.1-39.2	525	100	50	1+2	16.0

Straps for clamps < 15.8mm Ø are already assembled with the body. Clamps for other dimensions on request.

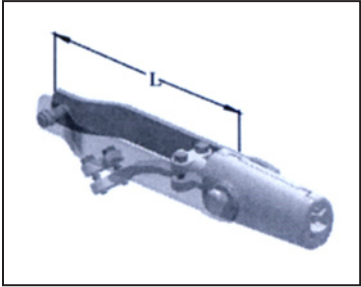

Variation 1
with jumper attachment

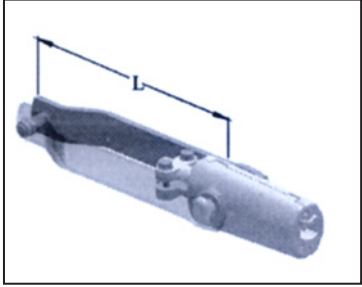

Variation 2
without jumper attachment