



OH Line Stringing

Hand Line Blocks


Description:

A lightweight hauling pulley block. High strength aluminium alloy body and sheave, bronze olite bearings. WLL of 454kg (1000lbs). Hinged snatch block head with quick opening side gate spring and pin assembly. Swivel safety hook head fitting. Suitable for synthetic or natural fibre rope 12 to 15mm dia.

Weight: 1kg

Code: 303B2PJM

NOTE: Both handle and blocks can be used with cross arm sling on page 27.

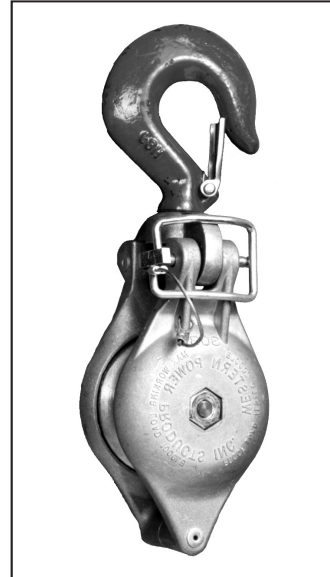

Hand Line Blocks


Description:

A lightweight hauling line pulley block, nylon body and sheave. WLL 454kg (1,000 lbs). Hinged snatch block head with quick opening side gate pin and spring assembly. Swivel safety hook head fitting, throat opening 22mm. Sheave OD 75mm, Sheave ID 6mm, Sheave width 18mm. Suitable for synthetic or natural fibre rope 12 to 15mm diameter.

Weight: 835g

Code: HLB-1000M

NOTE: Both handle and blocks can be used with cross arm sling on page 27.

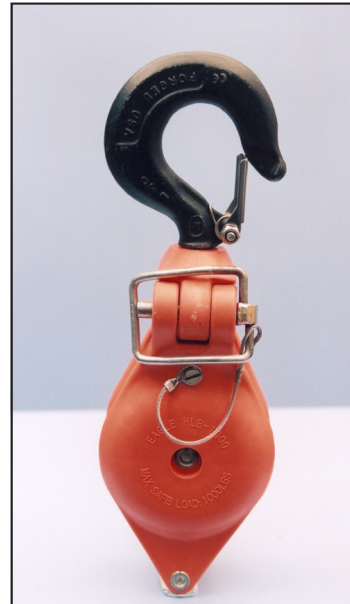



OH Line Stringing

Hand Line Blocks

Description:

Suitable as a lightweight hauling line pulley block. Single aluminium sheave, steel body, hinged side opening gate and swivel safety hook head fitting.



CODE	Dimensions mm					Recom- mended ROPE diameter mm	Rated Load kN	Breaking Load kN	Weight g
	Sheave OD	Sheave root dia.	Sheave inside width mm	Sheave outside width OD	Throat opening of safety hook				
	mm	mm	mm	mm	mm				
12153	90	58	18	25	16	12 or 13	5	15	900

NOTE: Both handle and blocks can be used with cross arm sling on page 27.