





# OH Line Tensioning

## Comealongs for Bare Copper, Aluminium & ACSR, Coated & Uncoated Steel

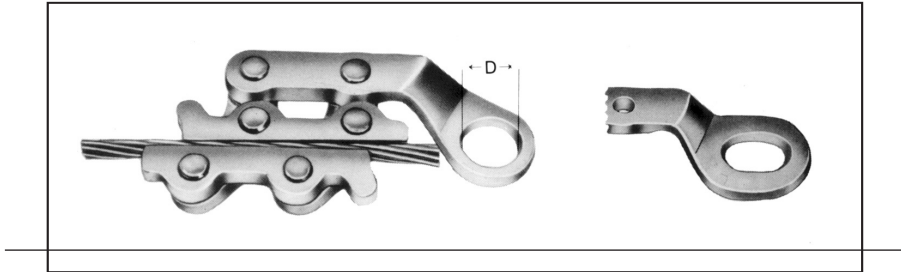

**Description:**  
Plated steel body with long, parallel steel tensioning jaws. Simple and easy handling. Strong spring loading holds tool on wire automatically. No wire slippage up to rated limits of grip.

### Copper & Steel Wire



CODE	DIAMETER RANGE mm	CROSS SECTIONAL AREA mm <sup>2</sup>	EYE OPENING D mm	WLL kN	WEIGHT kg
12504	1 - 5	1 - 16	20	5.0	0.27
12511	3 - 9	6 - 35	22	10.0	0.85
12528	4 - 12	16 - 70	27	17.0	1.20
12535	6 - 18	50 - 150	25 x 38	30.0	1.85
12542	10 - 28	90 - 400	30 x 40	35.0	3.80
12559	20 - 40	240 - 400	30 x 40	40.0	6.20

### Aluminium & A.C.S.R.



CODE	DIAMETER RANGE mm	CROSS SECTIONAL AREA mm <sup>2</sup>	EYE OPENING D mm	WLL kN	WEIGHT kg
12801	5.4 - 8.5	25 - 35	22	10.0	0.80
12818	8 - 12	50 - 70	27	17.0	1.15
12825	8 - 18	50 - 150	25 x 38	30.0	1.83
12856	15 - 28	120 - 400	30 x 40	35.0	6.60