


Insulating Rope

Rope for Live Working

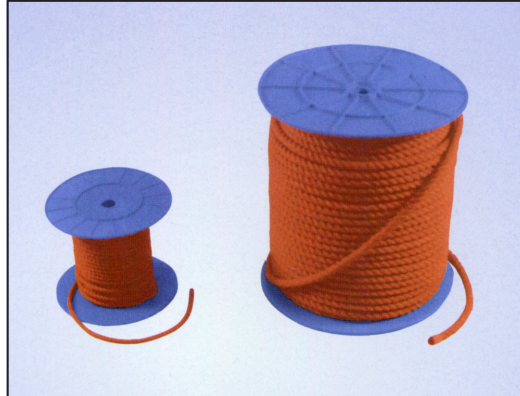

Description:

Insulating rope is manufactured from red colour, water repellent three-strand synthetic fibre with a low water absorption coefficient. Available in coil lengths of 100, 200 or 300m. Meets the following requirements:

- IEC 62192 draft standard on 'Ropes of Insulating Materials'
- European directive 98/37/EC governing machines and hoisting equipment No. 01.B.880.B
- European directive 89/686/EEC governing individual protective equipment
- Standard NF EN 353-2 governing mobile fall prevention devices on flexible safety supports: No. 0082/622/160/04/02/0100 & No. 0082/037/169/04/94/0030 extension 06/03/02. Approved by the French Live Working Committee. Subject to 100kV/300mm in dry and humid conditions.

| CODE | DIAMETER mm | BREAKING LOAD daN | WEIGHT g/m |
|------|----------------|----------------------|---------------|
| IR8 | 8.0 | 686 | 35 |
| IR13 | 13.5 | 2300 | 110 |
| IR16 | 16.0 | 3100 | 155 |
| IR19 | 19.0 | 3600 | 155 |

NOTE: Refer to Technical Sheet HV-VHV No 71B for operation and maintenance requirements.