



# Overhead Line Connectors

## Split Bolt Connectors






**Description:**

Split Bolt Connectors are available in electro-tinned brass or copper plated brass and are used for joining bare overhead hard drawn copper conductors or other bare stranded copper conductors. The extruded brass metal complies with BS2874 and dimensions comply with ESAA Specifications. A standard line tap spanner will fit the connectors (Code LTS2-2 ended, LTS4-4 ended).

ESAA TYPE	CODE		MAX CU CONDUCTOR		DIMENSIONS								WEIGHT
	COPPER PLATED	ELECTRO TINNED	mm <sup>2</sup>	WIRES/ IMPERIAL	mm * (except B which is in inches)								
					A	B	C	D	E	F	G	H	g
<b>OVERHEAD LINE CONNECTORS</b> <b>Split Bolt Connectors</b> <b>Description:</b> Split Bolt Connectors are available in electro-tinned brass or copper plated brass and are used for joining bare overhead hand drawn copper conductors or other bare stranded copper conductors. The extruded brass metal complies with BS2874 and dimensions													

\*Tolerance + - 5%

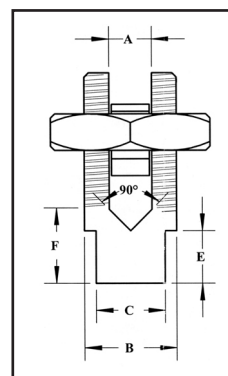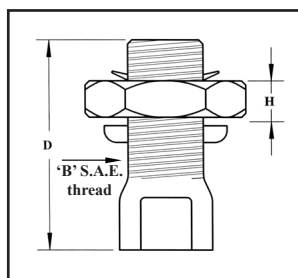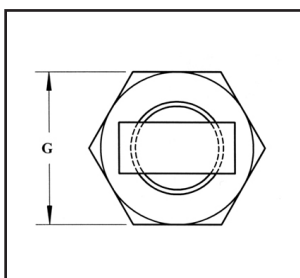

## Split Bolt Shrouds

**Description:**

Plastic Shroud for Size 22 (ESAA type A)

**Code:** SBC22SH

**Weight:** 18g

