




T-Mac® Portable Earthing Equipment

Standard Clamps



CL50 CL95

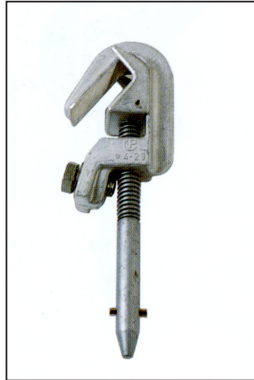

CL309




CL459



CL50B CL95B



CL419

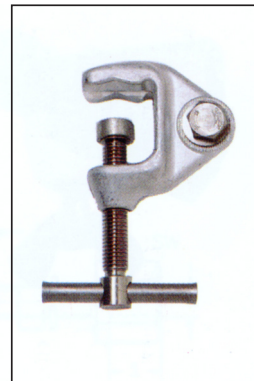

CL419F

Clamp Code	Application	Conductor Type	Clamp Range mm	Maximum Cable Size mm ²	Maximum Rating kA/0.5 sec rms	Ball Pin Ømm
CL50	Phase	○ ● ■	2 - 42	50	18	-
CL50B	Phase/Earth	○ ● ■ 🔑	2 - 42	50	18	20
CL95	Phase	○ ● ■	2 - 42	95	33	-
CL95B	Phase/Earth	○ ● ■ 🔑	2 - 42	95	33	25
CL309	Phase	○ ● ■	4 - 23	70	25	-
CL419	Earth	○ ● ■ (40 wide)	2 - 30	70	25	-
CL419F	Earth	○ ● ■	2 - 30	50	18	-
CL459	Phase	○ ●	10 - 85	95	33	-

○ Circular (tube or rod)

● Stranded

■ Flat Busbar

🔑 Ball Pin