




# Overhead Line Connectors

## Stirrup Clamps

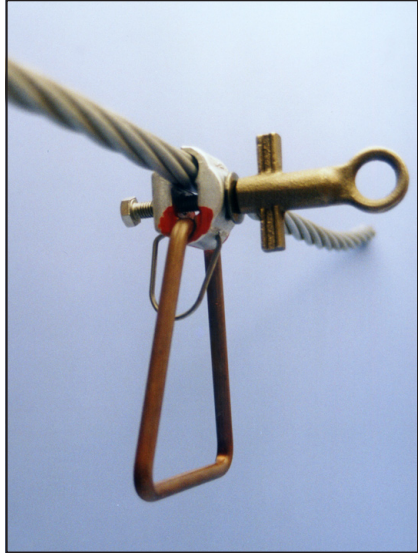

**Description:**

Provides a stirrup or “bail” of 8mm diameter copper bar for connection of disconnectable copper branch conductors.

**Features:**

- Spring-loaded design for easy application as a single unit
- Single-bolt or ring-bolt type (used for live-line application)
- Forged parallel-groove clamp for high-reliability connection to main conductor
- For aluminium or copper main conductors
- Special type for aluminium stirrup available on request

| CODE       | MAIN CONDUCTOR RANGE |   | STIRRUP TYPE | BOLT        | WEIGHT<br>g |
|------------|----------------------|---|--------------|-------------|-------------|
|            | DIAMETER RANGE<br>mm | CROSS SECTIONAL AREA<br>mm <sup>2</sup> |              |             |             |
| PBA35-120  | 7.5-14.0             | Al 35-120                               | Cu 8mm dia   | 1 x M8 hex  | 240         |
| PBA35-120S | 7.5-14.0             | Al 35-120                               | Cu 8mm dia   | 1 x M8 ring | 365         |
| PBC6-70    | 2.7-10.5             | Cu 6-70                                 | Cu 8mm dia   | 1 x M8 hex  | 265         |
| PBC6-70S   | 2.7-10.5             | Cu 6-70                                 | Cu 8mm dia   | 1 x M8 ring | 390         |