




## OH Line Stringing

### Stringing Blocks - Single Sheave 120 - 400mm dia

**Description:**

Nylon or aluminium sheave mounted on roller bearings. Plated steel frame with hinged side gate. Swivel hook, round eye or clevis head fittings are available (nominate type). Suitable for AAAC or ACSR overhead line conductors and designed to allow compression sleeves, swivels, cable stockings and pulling-in rope to pass through the sheave. Safety factor 2.5:1

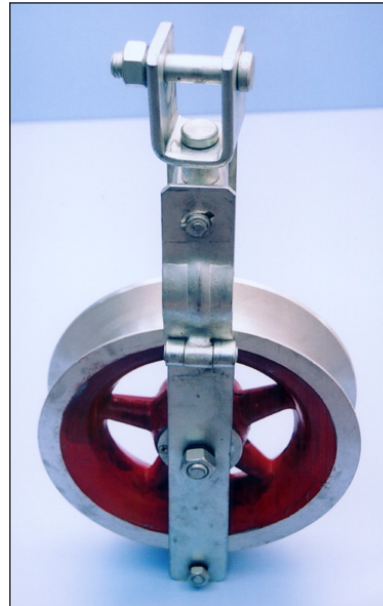

CODE	SHEAVE DIMENSIONS OD x WIDTH mm x mm	ACSR CONDUCTOR RANGE mm <sup>2</sup>	RATED LOAD kN	WEIGHT kg	SHEAVE MATERIAL
10171	120 x 30	25 - 70	5	2.0	Aluminium
10172	160 x 40	95 - 120	10	3.2	
10173	200 x 40	150 - 240	15	3.8	
10174	200 x 60	150 - 240	15	4.2	
10175	250 x 40	150 - 240	20	5.2	
10176	250 x 60	300 - 400	20	5.5	
10177	270 x 60	300 - 400	20	6.8	
10178	320 x 60	300 - 400	20	10.5	
10179	400 x 80	400 - 500	20	12.0	
10191	120 x 30	25 - 70	5	1.5	
10192	160 x 40	95 - 120	10	2.4	
10193	200 x 40	150 - 240	15	2.6	
10194	200 x 60	150 - 240	15	3.1	
10195	250 x 40	150 - 240	20	3.7	
10196	250 x 60	300 - 400	20	3.9	
10197	270 x 60	300 - 400	20	4.4	
10198	320 x 60	300 - 400	20	7.5	
10199	400 x 80	400 - 500	20	8.0	