




OH Line Stringing

Stringing Blocks - Single Sheave 120 - 400mm dia

Description:

Nylon or aluminium sheave mounted on roller bearings. Plated steel frame with hinged side gate. Swivel hook, round eye or clevis head fittings are available (nominate type). Suitable for AAAC or ACSR overhead line conductors and designed to allow compression sleeves, swivels, cable stockings and pulling-in rope to pass through the sheave. Safety factor 2.5:1

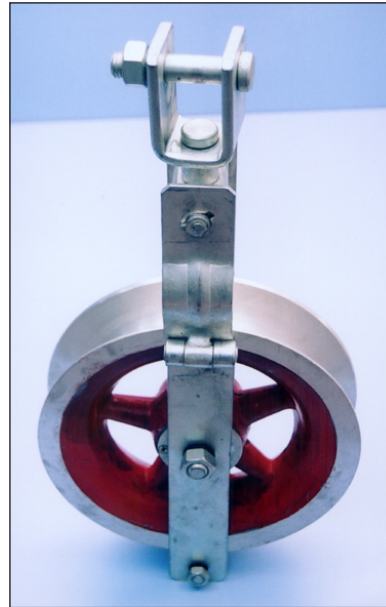

CODE	SHEAVE DIMENSIONS OD x WIDTH mm x mm	ACSR CONDUCTOR RANGE mm ²	RATED LOAD kN	WEIGHT kg	SHEAVE MATERIAL
	OH Line Stringing Stringing Blocks - Single Sheave 120-400mm dia				Aluminium
	Description: Nylon or aluminium sheave mounted on roller bearings. Plated steel frame with hinged side gate. Swivel hook, round eye or clevis head fittings are available (nominate type). Suitable for AAAC or ACSR overhead line conductors and designed to allow compression sleeves, swivels, cable stockings and pulling-in rope to pass through the sheave. Safety factor				
					Nylon