




# Detectors for HV Systems

## Test Head Type PHE III

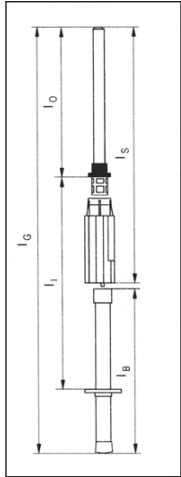

**Features:**

- Insulating operating rod: Foam-filled fibreglass 30mm dia, tested to IEC 60855, detachable for easy storage
- Indicator unit: Fully insulated grey plastic
- Indication: Visual LEDs and acoustic signal
- Test probe: Fibreglass-reinforced epoxy resin 20mm dia  
Interchangeable for switchgear and overhead lines  
Detachable for easy storage
- Probe electrode: Tinned copper, removable, for switchgear and overhead lines
- Discharge current: Less than 0.5mA
- Application: For switchgear and overhead lines  
Suitable for use in wet weather

**Indications:**

- Self-test: Push button - single acoustic signal, then steady green light
- Ready for operation: Steady green light
- Voltage present: Flashing red light and acoustic signal

CODE	VOLTAGE kV	DIMENSIONS mm					WEIGHT kg
		lg	li	lo	ls	lb	
767 711	3 .... 10	1410	525	620	790	640	1.1
767 721	6.....20	1570	525	780	950	640	1.2
767 731	10.....30	1670	525	880	640	1050	1.25

Operating instructions available on request from Thew & McCann