





# OH Line Tensioning


**Comealongs for Bare Copper, Aluminium, Coated & Uncoated Steel**

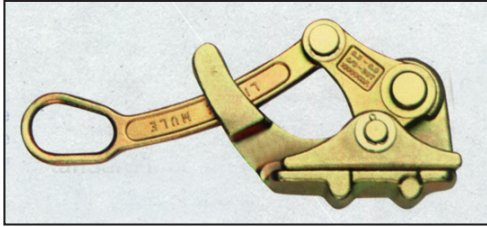

**A** Standard grip - Spring-loaded body

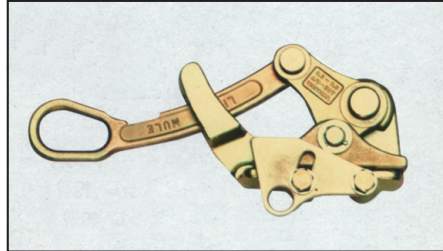

**B** Hot Line Model - Spring-loaded body and safety gate. Notched handle.

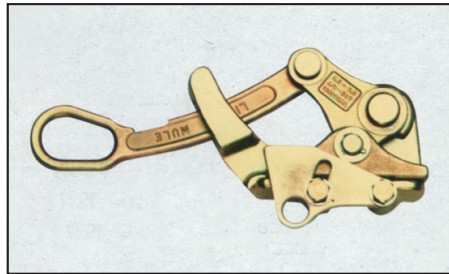

**C** Hot Line Model - Non-Spring-loaded body. Spring loaded safety gate.

### Description:

Comealong grips, forged steel construction with yellow chromate finish. Available with spring loaded and non spring loaded body. Notched handle on spring loaded models locks grip in open position for placement on or removal from wire, then releases instantly. Replacement jaw, machined with large aggressive (course) teeth available on all 22.7 & 45.3kN Models, recommended for galvanised steel stay wire.


CODE	TYPE	Jaw and Teeth Configurations	Diameter Range mm	Eye Opening in Handle mm	WLL kN	WEIGHT kg
LMG1000*	<b>A</b> Standard Grip Spring Loaded	①	1.01-10.03	15.87(Ø)	4.5	0.22
LMG2000*		①	2.77-15.08	25.4 x 38.1	9.0	0.45
LMG4500		② 2a Optional	4.57-15.24	31.75 x 44.45	22.7	1.47
LMG4600		② 2a Optional	7.62-20.32	31.75 x 44.45	45.3	2.04
LMG4800		②	17.78-31.75	31.75 x 44.45	54.4	3.6
LMG4700		②	17.78-31.75	63.5 x 88.9	90.9	9.5

\*LMG1000 & LMG2000 Have Bulldog Type Jaw. All other models have parallel jaw.



# OH Line Tensioning

## Comealongs for Bare Copper, Aluminium, Coated & Uncoated Steel

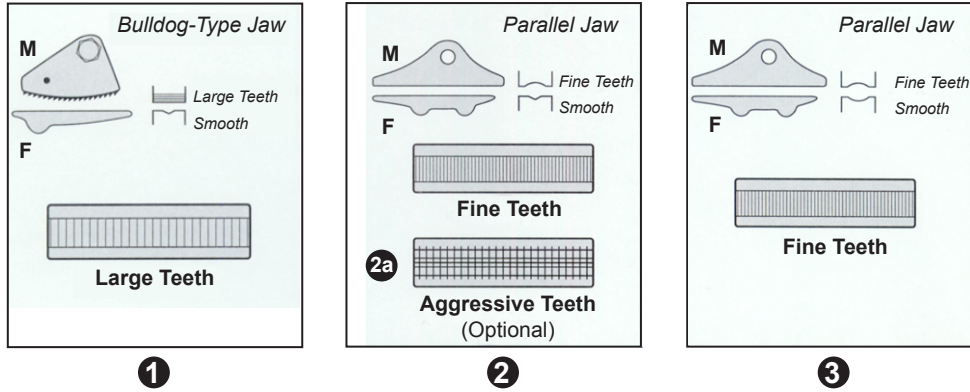

①

②

③

M: Movable Jaw F: Fixed Jaw

②a Aggressive teeth (course) optional on all 22.7 & 45.3kN models. Recommended for coated steel wire.

### Description:

Comealong grips, forged steel construction with yellow chromate finish. Available with spring loaded and non spring loaded body. Notched handle on spring loaded models locks grip in open position for placement on or removal from wire, then releases instantly. Replacement jaw, machined with large aggressive (course) teeth available on all 22.7 & 45.3kN Models, recommended for galvanised steel stay wire.

CODE	TYPE	Jaw and Teeth Configurations	Diameter Range mm	Eye Opening in Handle mm	WLL kN	WEIGHT kg
LMG4501	B Hotline Model Spring Loaded Notched Handle	②	4.57 - 15.24	31.75 x 44.45	22.7	1.47
LMG4601		②a Optional	7.62 - 20.32	31.75 x 44.45	45.3	2.04
LMG4801		③	17.78 - 31.75	31.75 x 44.45	54.4	3.6
LMG4701		③	17.78 - 31.75	63.5 x 88.9	90.9	9.5

CODE	TYPE	Jaw and Teeth Configurations	Diameter Range mm	Eye Opening in Handle mm	WLL kN	WEIGHT kg
LMG4502	C Hotline Model No Spring Body No notch No gate	②	4.57 - 15.24	31.75 x 44.45	22.7	1.47
LMG4602		②a Optional	7.62 - 20.32	31.75 x 44.45	45.3	2.04
LMG4802		③	17.78 - 31.75	31.75 x 44.45	54.4	3.6
LMG4702		③	17.78 - 31.75	63.5 x 88.9	90.9	9.5

\*LMG1000 & LMG2000 Have Bulldog Type Jaw. All other models have parallel jaw.